


Vitality_® Flip Wall Mirror - YM4836RCFPD4P - Specification Sheet

Features

- Front and side diffuser, no visible LED's
- Plug-in mirror, saves on install time
- · All hardware with security bracket included
- Energy efficient LED lighting: (measurements may vary)

Kelvin	4000
CRI	90+
Lumens* (Estimated)	1090
R9 Value*	50+
Watt Output - LED with optional defogger on	150w max

^{*} Mirror measured not the raw LED.

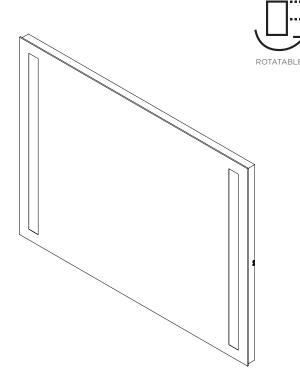

Construction

- Anodized aluminum back frame
- Quality polished edge mirror
- Power cords installed for easy plugin installation
- Constructed for surface mounting
- Includes installation hardware

Codes/Standards Applicable

Vitality Mirror is UL certified to:

- UL 962
- CSA-C22.2, No. 250.4

Dimensions

Height: 36" (914 mm) Width: 48" (1219 mm) Depth: 1-3/4" (45 mm)


Electrical System

• 120 Vac 60Hz wall outlet as shown in drawing


Options

- Mirror defogging
- Dimmable LED task lighting to 1%
- Compatible with most Triac/Phase-cut dimmers

Model Number Key										
Vitality Y	Mirror M	Width 48	Height 36	Shape R = Rectangle	Light Pattern C = Column	Edge Type FP = Flat, Polished	Defogger D = Defogger Included	Color Temp 4 = 4000K	Options P = Flip	

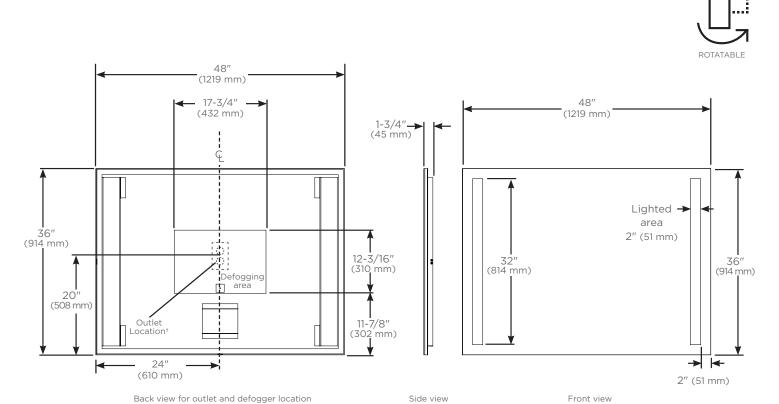

[†] See instructions for wiring and location

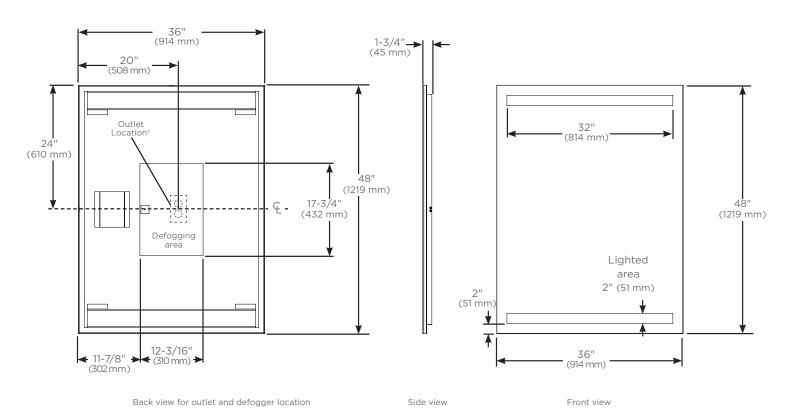

[†] See instructions for wiring and location